ZP886R-KITF

Ziton series intelligent addressable manual call point with back box and flip cover

General

The ZP880 Series is an intelligent range of addressable manual call points. The ZP886R-KITF is a red, single action indoor MCP. It is delivered complete with resettable element, test connector and test key, matching back box and protection flip cover. Multiple optional accessories are available to facilitate most indoor installation requirements.



Aesthetics

This single action MCP is a standard profile, indoor MCP suitable for surface mount installations using a standard back box. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view in a passage installation and with the flip cover installed. The clean face of the MCP is further enhanced by a front access & test key facility which is accessible without adjustment to the flip cover.

Installation & maintenance friendly

The front facing access for an aesthetically matching test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover without the need for additional tools.

Compatibility

The ZP880 range may be used on compatible Ziton fire systems. They can be deployed seamlessly into existing legacy systems without CIE configuration changes.

Details

- Reliable single action manual call point for surface mounting
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or optional frangible element
- Unobtrusive front facing test facility
- Standard mounting options facilitates easy installation
- Matching back box with rear, top and bottom cable entry
- Screen connection terminal for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Flip cover with breakable seal for protection against accidental activation
- Up to 127 devices per loop

ZP886R-KITF

Ziton series intelligent addressable manual call point with back box and flip cover

Technical specifications

General

Status indication	Dual LEDs, Alarm (red constant), Isolated (yellow constant), Fault (yellow blinking), Communication (green blinking)
User interface	LEDs, Alarm flag
Compatibility	Ziton ZP7 systems
Connectivity	2-wire loop
Addressing method	DIP Switches

Electrical

Power supply type	Loop powered
Operating voltage	16 to 20.5 VDC
Current consumption	250 µA (Quiescent) 280 µA (Alarm)
Cable specification	0.404 to 2.05 mm (0.13 to 3.31 mm²)
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)

Detection

Detection principle	Push button/switch
Monitoring	Activated, Fault, Off
Response time	< 3 s
Installation height	Determined by local regulation

Physical

Physical dimensions	109 x 94 x 81 mm (h x w x d)
Net weight	225 g
Colour	Red (RAL 3028)
Mounting type	Back box, Wall mount
Material (body)	Flame retardent ABS
Functional marking	House on Fire

Environmental


Vandal proof	No
Operating temperature	−25 to +72°C
Storage temperature	−25 to +72°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP41

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54:11

Compatible products

Category	Reference	Description
Detection device	N-MC-BS	MCP accessory, intelligent Manual Call Point breakable seal
Detection device	N-MC-FE	MCP accessory, intelligent manual call point frangible element

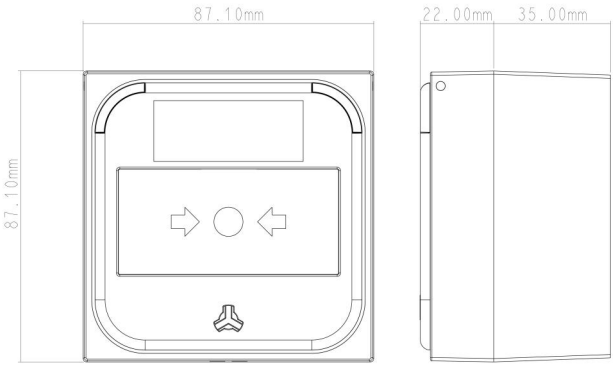

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 24 February 2026 - 9:31