1074D-N

Flanged recessed mount magnetic contact, white

Applications

The Sentrol 1072 series recessed contacts are designed for applications where the added integrity of mounting screws is needed. The units work well in both wood and metal frame doors and windows.

Easy Installation

The two mounting holes provide additional strength to prevent the contact and magnet from becoming dislodged due to environmental changes. This can occur when the door or window frames become warped and misaligned from moisture or the settling of a building.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Details

- Flange mounting for positive mounting; oversized holes
- Attractive, added security of recessed installation
- Mounting screws included

1074D-N

Flanged recessed mount magnetic contact, white

Technical specifications

General


Application type	Recessed mount
Contact type	DPDT
Connectivity	30 cm wire leads

Wired / wireless

Wired-wireless	Wired
Operating gap	13 mm (max.)

Physical

Physical dimensions	9 x 33 mm (Ø x L) (body) 19 mm (Ø) (flangle)
Colour	White

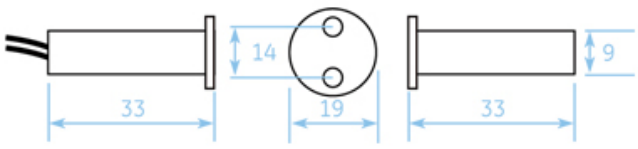

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:22