1085*-NCVB6

Surface mount contact with VDS cable, white

Sentrol 1085 series

The Sentrol 1085 series surface mount magnetic contacts are designed for use in installations where a small, sealed unit is required. The reed switch is totally encapsulated in Sentrol's exclusive polyurethane potting compound preventing moisture from entering the switch and causing false alarms.

Easy installation

The 16 mm standard gap distance allows for fast, easy installation and prevents false alarms from loose fitting doors. Recessed mounting holes make for clean-looking installations.

High Quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Details

- Convenient surface mounting
- Mounting screws included
- Neat and tidy design
- Comprehensive product range

1085*-NCVB6

Surface mount contact with VDS cable, white

Technical specifications

General

Application type	Surface mount
Contact type	NC
Connectivity	180 cm VDS cable

Wired / wireless


Wired-wireless	Wired
Operating gap	16 mm (max.)

Physical

Physical dimensions	51 x 9.5 x 9.5 mm (L x W x H)
Colour	White

Regulatory

EN50131 grade	Grade 2

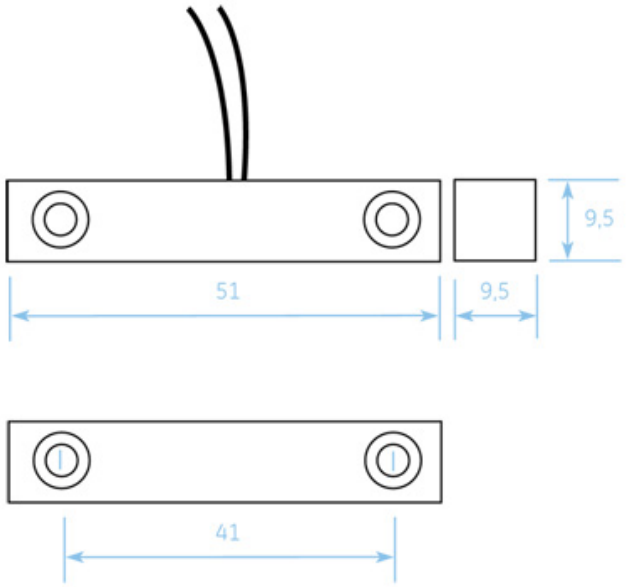

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:22